


■ Instruction images

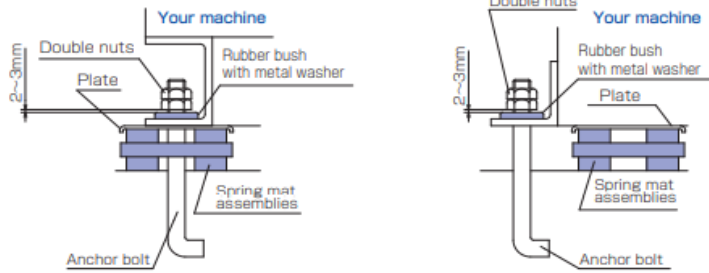

SM


Product number	Standard dimensions mm			Permissible load N (kgf)	Spring constant N/mm (kgf/cm)
	A	B	C		
SM-20C	20	20	13	200 { 20 }	59 { 60 }
SM-40C	20	20	13	390 { 40 }	110 { 110 }
SM-100C	30	22	10	980 { 100 }	250 { 250 }
SM-200C	30	22	10	2000 { 200 }	490 { 500 }

Product number	Permissible load N (kgf)	Spring constant N/mm (kgf/cm)
SM-300	2900 { 300 }	880 { 900 }
SM-450	4400 { 450 }	1180 { 1200 }


■ Options

●Plate


for SM-20C to 200C
SM-P-S



for SM-300 to 450
SM-P-L



●Rubber bush with metal washer



Product number	Standard dimensions mm					
	t ₁	t ₂	t ₃	d ₁	d ₂	d ₃
SM-B10	8.6	4	4.6	26	12.5	10.5
SM-B12	11.3	5	6.3	30	14.5	12.5
SM-B16	13.6	5	8.6	36	19	17
SM-B20	15.2	6	9.2	44	23	21
SM-B24	17.5	6	11.5	52	27.5	25.5

Plate is hot dip galvanized and RoHS-satisfied. Metal washer is SUS.